


附圖一

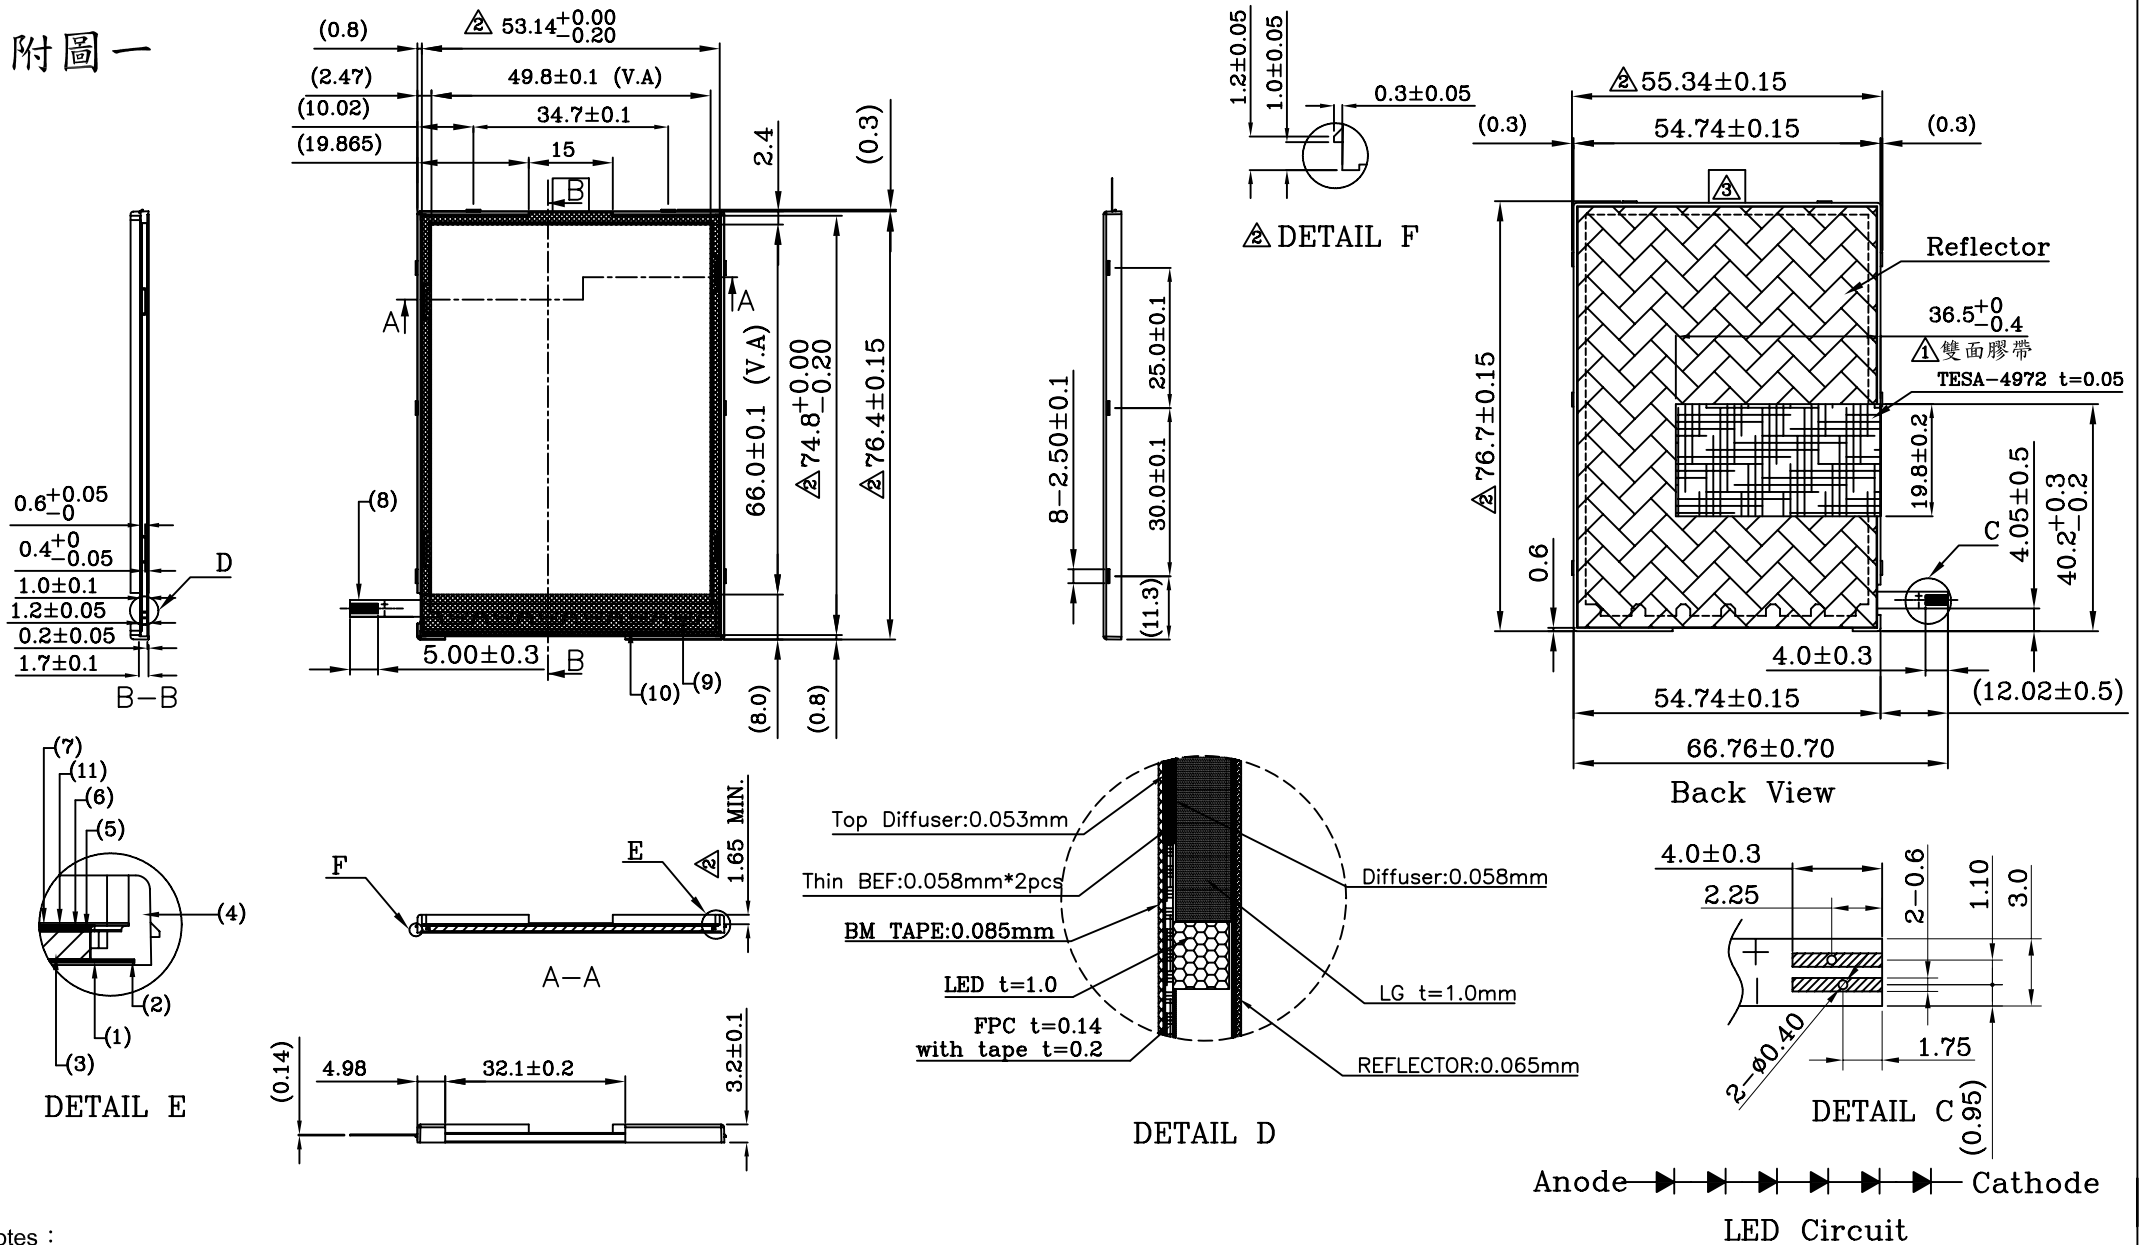

Notes :


- Unit : mm.
- Do not scale drawing.
- △ Modification rev.number.
- Current : 20mA ; Voltage : 21V (TYP.)
- Average brightness : 3200cd/m² (MIN.)
y=0.31±0.035
- Colour : C.I.E. x=0.30±0.035
- uniformity more than 80%

NO.	TITLE	QUANTITY	GENERAL TOLERANCE	3	11/15/05	避免引線方向更正	△
			DIM.	TOL.	2	10/15/05	增加、修正尺寸公差
			6	±0.10	1	10/15/05	加貼雙面膠帶
			16	±0.12			△
			51	±0.15			△
			51	±0.20			△
			HOLES	±0.10			△
			ANGLE	±0.5°			△
11.	TOP DIFFUSION FILM	1					
10.	DOUBLE TAPE	1					
9.	LED	6					
8.	FPC	1					
7.	BM TAPE	1					
6.	THIN BEF	2					
5.	DIFFUSION FILM	1					
4.	FRAME	1					
3.	LIGHT GUIDE	1					
2.	DOUBLE TAPE	4					
1.	REFLECTION FILM	1					
NO.	TITLE	QUANTITY					



定瑩光電股份有限公司
DIYN OPTOELECTRONICS CO.,LTD.

ITEM	DATE	DESCRIPTION	SIGN	MODEL	Q'TY	DATE	SCALE	UNIT	SIZE	MATERIAL	Title	PAGE
					1	11/15/05		mm	A3		240320D (3.2")	1/1
						DRAWING	DESIGN	CHECK	APPROVE	TO PROCESS	Parts NO:	REV
						Joyce_Lai					1402432301	B



DO NOT SCALE DRAWING.